


BAHA Manual symmetrical diverters 60°

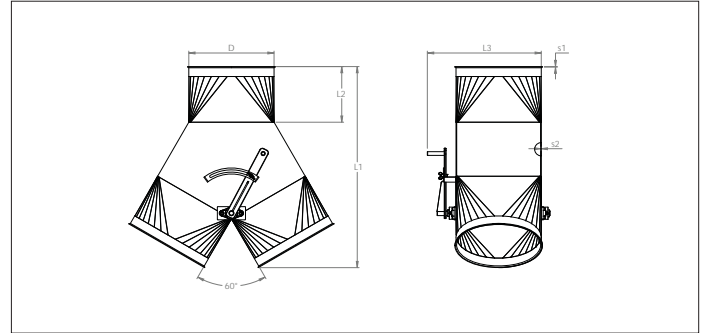

BAHA Manual symmetrical diverters 60°

Full welded manual symmetrical diverter for bulk transport to silos, containers and such.

The change in direction of the material is operated by moving the hand lever from left to right. It is held in position by the star-knob on the handle. The inner plate axle is mounted on two ball bearings for smooth running.

These diverters are designed to be used for falling material and light pneumatic transport (for example wood chips, polystyrene, non-fibrous material, etc.) in vertical ducting.

Material

2.00 mm powder coated black steel in RAL 5010.
Electrostatically conductive and food-safe powder coating thickness of 30 to 60 µm.
Temperature resistance up to +80°C.

Type

Welded and folded plates with 6 mm edges for lock rings.
Extra side reinforcements from Ø 500 mm and up.

Options

- with seal
- hot-dipped galvanized or stainless steel execution
- equipotential equalization
- other colors
- other sheet thicknesses, depending on material and diameter
- other types of edges or connections

Ø d mm	Code	L1 mm	L2 mm	L3 mm	s1 mm	s2 mm	Weight kg
100	BAHA000001	365	108	278	2.00	3.00	2.50
120	BAHA000002	365	108	278	2.00	3.00	3.10
125	BAHA000019	365	108	278	2.00	3.00	3.20
140	BAHA000003	490	150	354	2.00	3.00	3.80
150	BAHA000004	490	150	354	2.00	3.00	4.50
160	BAHA000005	490	150	354	2.00	3.00	5.60
180	BAHA000006	545	150	395	2.00	3.00	8.30
200	BAHA000007	545	150	395	2.00	3.00	8.50
225	BAHA000008	815	250	450	2.00	3.00	11.30
250	BAHA000009	815	250	450	2.00	3.00	14.20
275	BAHA000010	920	250	500	2.00	3.00	16.50
300	BAHA000011	920	250	500	2.00	3.00	19.30
315	BAHA000012	960	250	550	2.00	3.00	21.50
350	BAHA000013	960	250	550	2.00	3.00	23.90
400	BAHA000014	1135	300	600	2.00	3.00	36.40
450	BAHA000015	1195	300	650	2.00	3.00	40.90
500	BAHA000016	1360	350	710	2.00	3.00	53.60
550	BAHA000017	1385	350	750	2.00	3.00	66.50
600	BAHA000018	1645	400	840	2.00	3.00	79.60